

SP300CE 履带式圆锥破碎站

CRAWLER CONE CRUSHING PLANT



产品特点 Product Advantages

- ◆智能、自动化电气控制系统，包含自我诊断、安全互锁、自动报警，保障设备安全可靠。
The intelligent electrical control system has functions such as self-diagnosis, safety interlocking and automatic alarms, ensuring the safety and reliability of the equipment.
- ◆给料位置无级调节，主机破碎效率和稳定性更有保证。
Stepless adjustment of feeding position ensures stable crushing efficiency and machine reliability.
- ◆集成式变频系统，充分考虑防尘、散热、隔振、防水，电路系统万无一失。
Integrated variable frequency system has multiple functions, including dust-proof, cooling, shock isolation and water-proof, ensuring the safe of electrical system in all aspects.
- ◆智能多缸破碎主机，液压调节排料口、自动清腔、过载保护。
Intelligent multi-cylinder cone crusher with hydraulic adjustment of C.S.S., automatic cavity cleaning and overload protection functions.
- ◆破碎主机配备独立液压、润滑模块，高效、节能。
The crusher is equipped with independent hydraulic and lubrication modules, highly-efficient and energy-saving.

SP300CE 履带式圆锥破碎站

CRAWLER CONE CRUSHING PLANT




扫一扫视频号获取更多资讯

项目 Item	名称 Description	参数 Parameter
整机 Overall Unit	工作总功率 Total Working Power	327 kW
	整机重量 Total Weight	61 t
	动力方式 Drive Mode	外接电源 Electric
	处理能力 Processing Capacity	210-430 t/h
	工作尺寸 Working Dimension (L×W×H)	19500×4050×5085 mm
	运输尺寸 Transportation Dimension (L×W×H)	20200×3665×3900 mm
喂料设备 Feeding Equipment	喂料高度 Feeding Height	3000 mm
	料斗容积 Hopper Capacity	5 m ³
	最大喂料尺寸 Max. Feeding Size	210 mm
破碎主机 Crusher	进料口尺寸(长×宽) Inlet Opening Size (L×W)	—
	排料口调节范围 C.S.S. Range	22-51 mm
	破碎机重量 Crusher Weight	18.7 t
主输送皮带机 Main Conveyor	卸料高度 Discharge Height	3560 mm
	宽度 Width	1200 mm
振动筛箱 Vibrating Screen Box	筛网层数 Number of deck(s)	1(2)
	筛体尺寸 Screen Size	4500×1500 mm
返料皮带机 Return Conveyor	卸料高度 Discharge Height	4966 mm
	宽度 Width	500 mm
成品皮带机 Product Conveyor	卸料高度 Discharge Height	3563 mm
	宽度 Width	1000 mm
侧料皮带机○ Side Conveyor	卸料高度 Discharge Height	2855 mm
	宽度 Width	650 mm
行走系统 Travel System	行走控制方式 Travel Control Mode	液压 Hydraulic
	最大爬坡角度 Max. Climbing Angle	20°
除铁器 Magnetic Separator	除铁器配置 Configuration	永磁 Permanent Magnet
其他配置 Other Configurations	喷淋系统○ Sprinkling System	照明系统 Lighting System
	集中润滑系统 Centralized Lubrication System	远程遥控系统 Remote Control System
	智能控制系统 Intelligent Control System	集成式变频器 Integrated frequency converter

*根据客户工况需求,带○标记为选配;该款设备在选择侧料皮带机时,振动筛箱筛网层数为2层。

*According to customer's working condition, ○ is optional; The deck of screen is 2 if the side conveyor is selected.

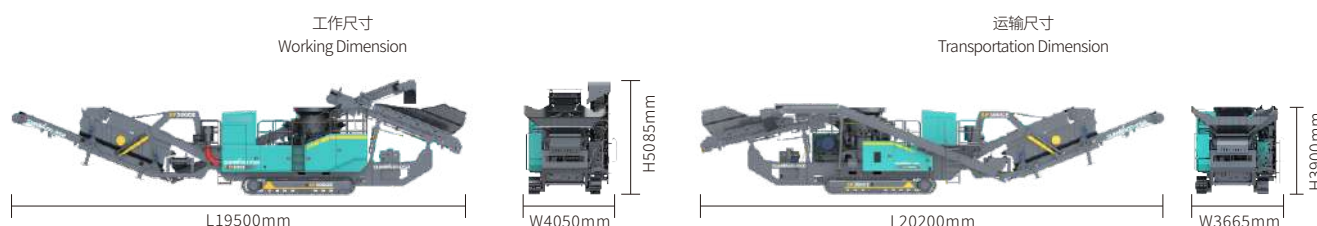

根据公司不断改进产品的方针,我们保留在未事先通知用户的情况下,改变参数和设计的权力,文中插图并不是设备的标准款式,山河普石勒保留最终解释权。
The parameters and design could be modified according to our upgrading plan. The illustration is not indicating the standard equipment. All rights reserved by Sunward•PSR.

Spartan Machinery Australia
Tel: 1300 440 693
Add: 803 Beaudesert Road, Archerfield QLD 4108
E-mail: sales@spartanmachinery.com.au Web: www.spartanmachinery.com.au