

SWA16JE

SWA Articulating Boom lifts(Electric)



SUNWARD



Standard Functions

Proportional Control	Emergency Descent System	360 Degree Continuous Rotation of Turntable	Long Distance Communication System
Load Sensing System	Timer	Buzzer	Hydrostatic Automatic Leveling System
Flash Lamp	Fault Diagnosis System	Tilt Protection System	The Horn



Optional Functions

Air Pipe To Platform	Biodegradable Hydraulic Fluid	AC Power Connected To The Platform	Platform Working Light
GPS Tracking System	Foam Filled Tire		

TECHNICAL PARAMETERS



SWA16JE

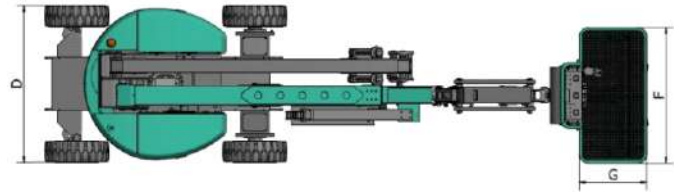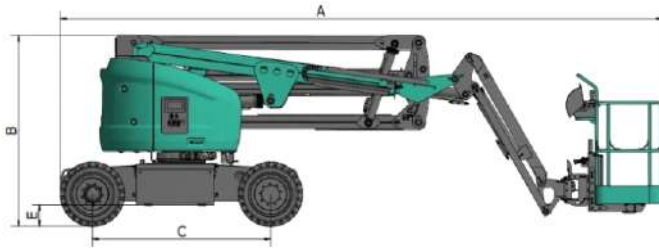


Dimension

	Max. working height	15.8m
	Max. platform height	13.8m
	Max. horizontal span	7.54m
	Height of Max. horizontal span	7.6m
A	Length - storage	6.63m
	Length - transport	5.7m
B	Height - storage	2.13m
C	The wheelbase	2m
D	Overall width	1.75m
E	Ground clearance - middle	0.2m
F/G	Size of working platform	1.52x0.76m

Performance

Rated load	230kg
Max. number of workers	2
Platform rotation	180°
Rotating turntable	360° continuous
Turntable tail swing	0.2
Traveling speed - Storage	5.2km/h
Traveling speed - Lifting	0.8km/h
Turning radius - Inside/outside	1.15/3.58m
Gradeability - four wheel driven - storage	30%
Max. allowable angle of work	3°
Power source	48V/390Ah
Hydraulic tank capacity	42L
Driven motor	AC 32V/3.56kW
Tire	250-15/70
Overall weight	7750kg

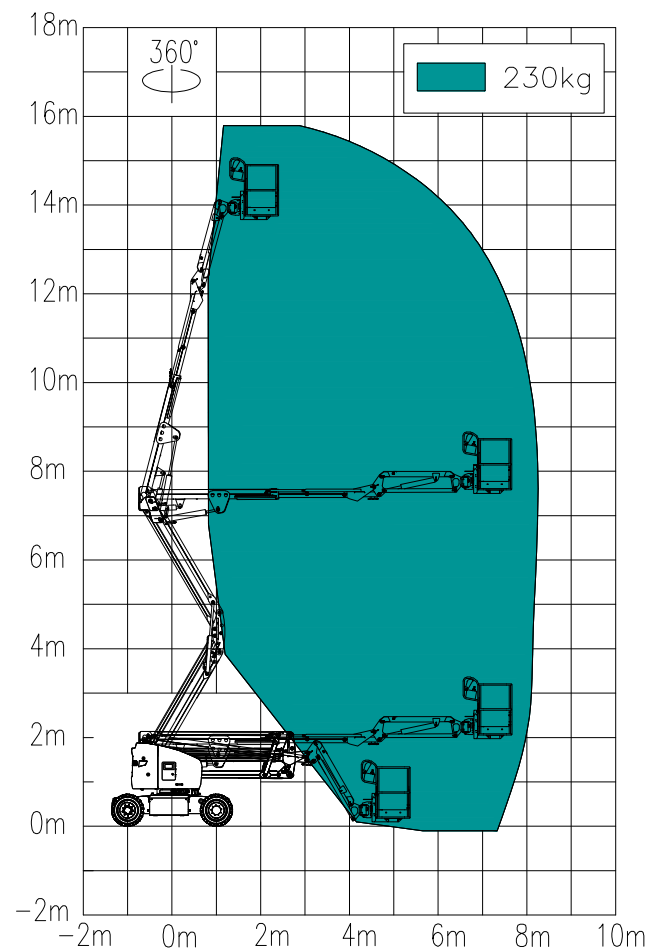

Working range of SWA16JE

* The working height equals to the platform height plus 2 m.

* The gradeability is adaptive to driving on slopes; refer to the Operation Manual for relevant levels of gradeability.

Spartan Machinery Australia

Tel: 1300 440 693

Add: 803 Beaudesert Road, Archerfield QLD 4108

E-mail: sales@spartanmachinery.com.au Web: www.spartanmachinery.com.au

