



SPARTAN



SUNWARD

SWTL2820

All-powerful small machines with big helpers

◆ Operating weight:2830kg

◆ Rated operating capacity:750kg



- ◆ Strong power, high reliability, low noise, energy saving, and environmental protection.
- ◆ Independent research and development of arc lifting mechanism, simple structure, strong bearing capacity, good reliability.
- ◆ ISO pilot operating mode with easy operation, flexible control and good inching performance.
- ◆ International universal quick-change device with easy switching of cleaning, milling, snow-blowing, and other accessories.
- ◆ Standard bucket floating and automatic leveling function that greatly improves the work efficiency.
- ◆ All-around maintenance space that ensures easy access to the parts to be maintained and facilitates maintenance.




SPARTAN



SWL2820 48.3HP

Machine Dimensions

	Boundary dimension (L*W*H)	mm	3307X1600X2014
A	Maximum overall height	mm	3850
B	Height to hinge pin	mm	3002
C	Height to top of cab	mm	2014
D	Height to bottom of level bucket	mm	2834
E	Length without standard bucket	mm	2604
F	Length with bucket	mm	3307
G	Maximum dump angle	°	42
H	Dump height	mm	2320
J	Dump reach	mm	475
K	Rollback angle (bucket on ground)	°	30
L	Rollback angle at maximum height	°	97
M	Wheelbase (Track Gauge)	mm	996
P	Ground	mm	212
Q	Departure angle	°	25
R	Turning radius from center (Coupler)	mm	1235
S	Turning radius from center (Bucket)	mm	1953
T	Turning radius from center (Machine rear)	mm	1531
U	Bumper overhang behind rear axle	mm	1001
V	Width over tire (Crawler Base)	mm	1293
W	Bucket width	mm	1600

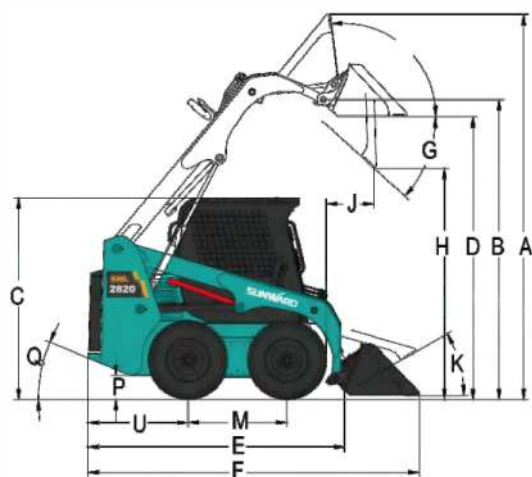

Performance

Operating weight	kg	2830
Rated operating capacity	kg	750
Tipping load	kg	1500
Breakout force curl	kg	2000
Breakout force lift	kg	1900
Travel speed	kph	13

Engine

Brand		KUBOTA	XINCHAI
Model		V2403-M-DI-E3B	4D29G31
Type		4-cylinder, water-cooled, diesel engine	
Emission level		EU stage III	GB III
Power	kW/rpm	36.0/2600	36.7/2500
Peak torque	N.m/rpm	156.3/1600	155/1700-1900

Transmission System

Type		Hydrostatic closed circuit
Pump		Variable displacement piston pump
Motor		2*Radial piston variable motor

Hydraulic System

Type		Throttling system
Pump		Gear pump
Hydraulic flow-Standard Hydraulic flow-High flow	lpm	63/92
Max. Pressure	bar	210
Control valve		Three joint multi-way valve
Control mode		ISO model of pilot control

Electric System


Starter motor	V/kW	12/2.0	12/3.0
Alternator rating	V/A	12/60	14/53.5
Battery	Ah	120	

Refill Capacities

Hydraulic tank	L	23
Fuel tank	L	75

Traveling System

Tire		10-16.5
------	--	---------

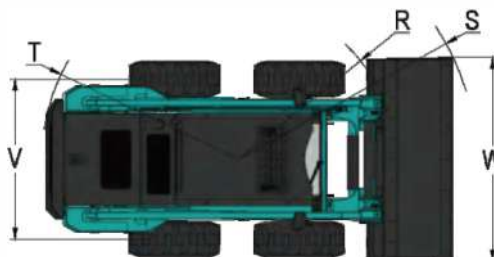

Spartan Machinery Australia

1300 440 693

<https://spartanmachinery.com.au/>

sales@spartanmachinery.com.au

803 Beaudesert Rd, Archerfield, QLD 4108

118 Main Rd, Clayton South, VIC 3169