



SL12W WHEEL LOADER

· Rated power/speed:18.5kW/2200rpm

· Standard bucket capacity:0.38m³

· Rated load capacity:1300kg



CONFIGURATION

Canopy

Electric Joystick

0.38(Detachable Shovel Teeth)

Floating Function

BOBCAT Quick Hitch

Pressure Measuring Valve

Differential lock function

Italy Hydrostatic transmission

Engine Preheating


Cooling Air Conditioner、Heater、Radio with MP3(Cabin)

OPTIONAL

Rops & Fops Cabin With Maintenance Port

Log Grasper

Goods Grasper

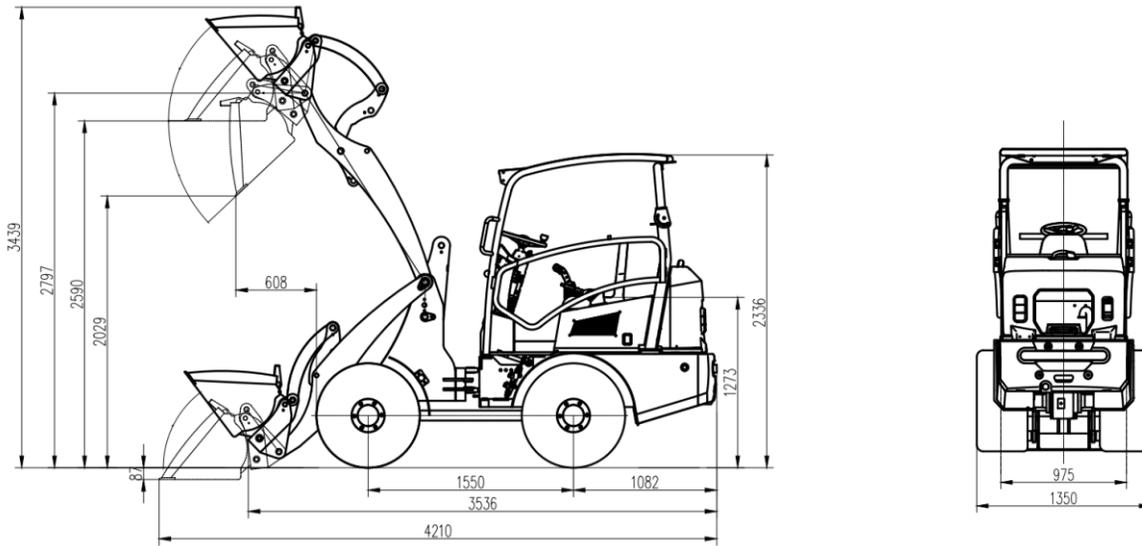

Vehicle parameters

| | |
|----------------------------------|---------------------|
| Overall length(bucket on ground) | 4210 mm |
| Overall Width | 1350 mm |
| Overall Height | 2336 mm |
| Bucket capacity | 0.38 m ³ |
| Rated load | 1300 kg |
| Overall Weight | 2500 kg |
| Max.Breakout Force | 19 kN |
| Max.Tractive Force | 17 kN |
| Max.Dumping height | 2029 mm |
| Max.Dumping reach | 608 mm |
| Min.base to the ground | 240 mm |
| Wheelbase | 1550 mm |
| WheelTread | 975 mm |
| Tyre | 10-16.5 |

Engine

| | |
|--------------------|--------------------------|
| Manufacturer/model | KUBOTA D1703(Euro5/EPA4) |
| Rated Power | 18.5 kw |
| Rated Speed | 2200 r/min |

Transmission System

| | |
|-------------------------|--------------------|
| Type | Hydrostatic |
| Shift gear control Type | Electric, Stepless |
| Travel speed | 7/18 |

Bucket

| | |
|--------------|--------------------------|
| Bucket width | 1500 mm |
| Bucket type | Heavy-duty bolt on teeth |

Operating System

| | |
|--------------------|--------------------------|
| Steering system | Full Hydraulic |
| Min.turning radius | 3336 mm |
| Driving system | Hydrostatic driving, 4WD |

Brake System

| | |
|---------------|------------|
| Service Brake | Drum brake |
| Parking Brake | drum brake |

