

INNOVATION LEADS TO VALUE



SUNWARD

SL16W WHEEL LOADER

· Rated power/speed:45kW/2200rpm

· Standard bucket capacity:0.73m³

· Rated load capacity:1600kg



CONFIGURATION

Rops & Fops Cabin With Maintenance Port

Electric Joystick

0.73(Detachable Shovel Teeth)

Floating Function

BOBCAT Quick Hitch

Pressure Measuring Valve

Cooling Air Conditioner

Heater

Engine Preheating


Radio with Mp3

Backward Camera

OPTIONAL

Log Grasper

Goods Grasper

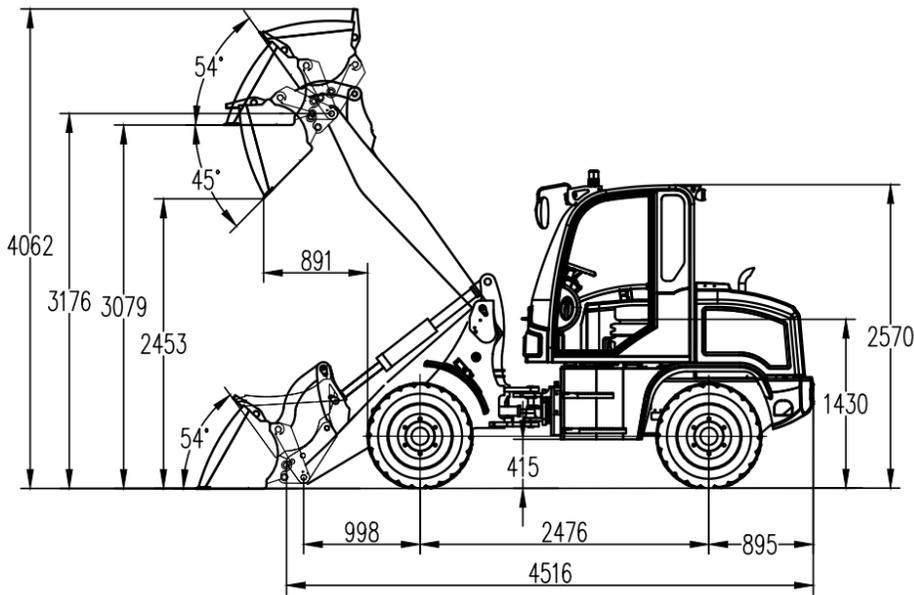

| Vehicle parameters | |
|----------------------------------|---------------------|
| Overall length(bucket on ground) | 5267 mm |
| Overall Width | 1850 mm |
| Overall Height | 2570 mm |
| Bucket capacity | 0.73 m ³ |
| Rated load | 1600 kg |
| Overall Weight | 4400 kg |
| Max.Breakout Force | 28 kN |
| Max.Tractive Force | 33 kN |
| Max.Dumping height | 2453 mm |
| Max.Dumping reach | 891 mm |
| Min.base to the ground | 410 mm |
| Wheelbase | 2476 mm |
| WheelTread | 1510 mm |
| Tyre | 23.5/70-16 |

| Engine | |
|--------------------|-------------------------|
| Manufacturer/model | YUNNEI DEF20CDF4(Euro5) |
| Rated Power | 45 kw |
| Rated Speed | 2400 r/min |

| Transmission System | |
|-------------------------|----------------------------|
| Type | Hydraulic Torque Converter |
| Shift gear control Type | Electric |
| Travel speed | 20 |

| Bucket | |
|--------------|--------------------------|
| Bucket width | 1850mm |
| Bucket type | Heavy-duty bolt on teeth |

| Operating System | |
|--------------------|-----------------------|
| Steering system | Full Hydraulic |
| Min.turning radius | 4476 mm |
| Driving system | Hydraulic torque, 4WD |

| Brake System | |
|---------------|------------|
| Service Brake | disc brake |
| Parking Brake | disc brake |

