

SP127JTD

履带式颚式破碎站(柴电两用)

CRAWLER JAW CRUSHING PLANT (DIESEL-ELECTRIC)



产品特点 Product Advantages

- ◆ 外接电、自主发电两种动力方式，节能、便捷。
Two power methods, including external and internal power supply, saving energy and convenient.
- ◆ 超大容量、坚固料斗，给料机配置刚强度耐磨板，保证给料结构稳定、耐用。
Solid hopper with large carrying capacity and feeder with high strength wear-resistant plate ensure the stability and durability of feeding structure.
- ◆ 破碎主机配备集中润滑系统，确保主机运行稳定、可靠。
The crusher is equipped with centralized lubrication system to ensure stable and reliable working performance.
- ◆ 集成式软启动系统，充分考虑防尘、散热、隔振、防水，电路系统万无一失。
Integrated variable frequency system with dust-proof, cooling, vibration isolation and water-proof functions maximizes the protection of electrical systems.
- ◆ 破碎主机采用整体铸钢轴承箱，动颚总成经久耐用。
The crusher adopts integral casting bearing housing, ensuring the durability of movable jaw assembly.

SP127JTD 履带式颚式破碎站 (柴电两用)

CRAWLER JAW CRUSHING PLANT (DIESEL-ELECTRIC)



扫一扫视频号获取更多资讯


项目 Item	名称 Description	参数 Parameter
整机 Overall Unit	工作总功率 Total Working Power	165 kW
	发电机组功率 Generator Power	320 kW
	整机重量 Total Weight	60 t
	动力方式 Drive Mode	柴-电两用 Diesel-electric
	处理能力 Processing Capacity	170-520 t/h
	工作尺寸 Working Dimension (L×W×H)	18251×5032×4541 mm
	运输尺寸 Transportation Dimension (L×W×H)	16700×3600×3950 mm
喂料设备 Feeding Equipment	喂料高度 Feeding Height	4277 mm
	料斗容积 Hopper Capacity	10 m ³
振动给料机 Vibrating Feeder	最大喂料尺寸 Max. Feeding Size	700 mm
	给料机尺寸(长×宽) Feeder Size (L×W)	4795×1180 mm
破碎主机 Crusher	进料口尺寸(长×宽) Inlet Opening Size (L×W)	1150×760 mm
	排料口调节范围 C.S.S. Range	70-200 mm
	破碎机重量 Crusher Weight	19.5 t
主输送皮带机 Main Conveyor	卸料高度 Discharge Height	3712 mm
	宽度 Width	1200 mm
行走系统 Travel System	行走控制方式 Travel Control Mode	液压 Hydraulic
	最大爬坡角度 Max. Climbing Angle	20°
除铁器○ Magnetic Separator	除铁器配置 Configuration	永磁 Permanent Magnet
其他配置 Other Configurations	喷淋系统○ Sprinkling System	照明系统 Lighting System
	集中润滑系统 Centralized Lubrication System	远程遥控系统 Remote Control System
	智能控制系统 Intelligent Control System	集成式变频器 Integrated frequency converter

*根据客户工况需求,带○标记为选配;

*According to customer's working condition, ○ is optional.



L18251mm

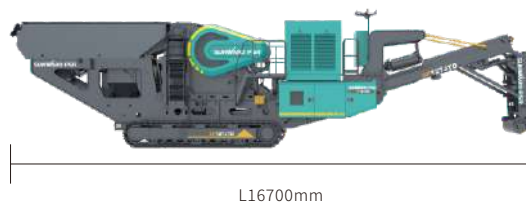

L16700mm


工作尺寸
Working Dimension



W5032mm

H4541mm

运输尺寸
Transportation Dimension



W3600mm

H3950mm

根据公司不断改进产品的方针,我们保留在未事先通知用户的情况下,改变参数和设计的权力,文中插图并不是设备的标准款式,山河普石勒保留最终解释权。
The parameters and design could be modified according to our upgrading plan. The illustration is not indicating the standard equipment. All rights reserved by Sunward•PSR.

Spartan Machinery Australia
Tel: 1300 440 693
Add: 803 Beaudesert Road, Archerfield QLD 4108
E-mail: sales@spartanmachinery.com.au Web: www.spartanmachinery.com.au